



MICRO DIAPHRAGM LIQUID PUMPS NF 25

DATA SHEET NF 25



Concept

KNF micro diaphragm liquid pumps are based on the principle of the oscillating displacement pump which is remarkably simple in design. The circular power from the motor is converted into vertical movement by an eccentric. This motion is then transferred to a diaphragm by means of a connecting rod which in conjunction with an inlet and outlet valve creates a pumping action.

NF 25 type liquid pumps can be mounted in any position and can deliver up to 250 ml/min depending on the model and will operate against pressures of up to 10 mWg.

The KNF modular system contains a wide standard range of materials, motors, voltages and frequencies to enable the selection of an optimal solution for your application.

Features

Small and powerful

Micro design and maximum performance resulting from built-in technology are the outstanding characteristics of this product.

Self-priming and excellent for pressure

Sophisticated diaphragm technology and precise valve structures enable performances from 3 mWg suction and 10 mWg pressure.

Extreme chemical resistance

The use of chemically resistant materials such as PTFE (TFM), PVDF, FFPM or other material combinations for the parts which come in contact with the liquid allows almost all neutral or corrosive liquids to be pumped.

Dry running, durable and maintenance free

The carefully considered design of these pumps allows them to be run dry and ensures safe operation and a long life even under the most severe conditions.

Areas of use

The versatility of KNF pumps allows a wide field of applications to be covered. Over many years our pumps have proved themselves in the following areas:

Analysers

- Medical / pharmaceutical
- Environmental / water treatment
- Food / toxicology

Laboratory

- Filtration
- Chromatography

Cleaning industry

- Cuvette cleaning
- Sterilisers
- Industrial washing machines

Printing

- Ink jet printing
- Photographic / film development

Other applications for diaphragm liquid pumps include: fuel cells, hydrogen generators, CD coating, dental technology, textiles and many more.

Performance					
Type	Flow rate (ml/min)	Suction head (mWg)	Pressure head (mWg)		
NF 25 DC-M	250	3	10		
NF 25 DC-L	250	3	10		
NF 25 DCB-4	25 - 250	3	10		

The KNF Modular Concept of Selection

General note

This Data Sheet provides an overview of the options with our NF 25 pumps. Certain standard options will be explained in more detail where necessary.

Flow curves

The flow curves illustrate how the flow rate alters in relation to the pressures before and after the pump. In the case of a combination of both we would be very happy to advise what the expected flow rate would be.

The values given in the curves are dependant upon the liquid, choice of head materials and the type of hoses being used. Therefore a certain deviation is to be expected.

Note: The flow rate is measured with water at 20°C.

1 Materials of head components

KNF FLODOS offers a wide range of different materials for those parts which come in contact with the liquid thus allowing the possibility of pumping most liquids.

2 Motors

DC-M Direct current motor

DC-L Ironless direct current motor

This provides the following advantages compared to a conventional DC motor: higher durability, less power consumption and smaller size.

DCB-4 Brushless direct current motor

This type of motor has no brushes which can wear down thus giving it a higher lifetime and no brushes fire. Compact size, flow rate control over motor speed are the advantages of this motor.

Leads DCB-4			
Function	lead	signal name	signal
+ voltage	red	+Vs	10..28VDC
- voltage	black	-Vs/GND	-
control voltage			
input signal	white	Vctrl	0.3..5 VDC
impulse			6 Pulses /
generator	green	FG	rot.

3 Voltages

Choose from the different electrical connection possibilities. Special variations are available.

Modules

Our versatile self-selection program allows you to personally determine the optimum characteristics that you require from your pump. Select your diaphragm pump from the following characteristics:

Pump type			
Basic model	Components		
	1	2	3
NF 25			

1	Materials of head components	
KP	Head	PP
	Valves	EPDM
	Diaphragm	EPDM
	Resonating diaphragm	EPDM
KT	Head	PP
	Valves	FFPM
	Diaphragm	PTFE covered
	Resonating diaphragm	FFPM
TT	Head	PVDF
	Valves	FFPM
	Diaphragm	PTFE covered
	Resonating diaphragm	FFPM

2	Motors
DC-M	Direct current motor
DC-L	Ironless direct current motor
DCB-4	Brushless direct current motor

3	Voltages
12/24V	for DC motors
10..28V	for DCB motor




NF 25 DC-M /L

NF 25 DCB-4

Performance

Basic model	Flow rate at atmos. pressure (ml/min)	Max. suction head (mWg)	Max. pressure head (mWg)
NF 25 DC-M	250	3	10
NF 25 DC-L	250	3	10




Motor selection	DC-M	DC-L
Supply voltage (V)	12 / 24	12 / 24
Power rating (W)	2.9 / 2.9	1.9 / 1.9
I max. last (A)	0.24 / 0.12	0.16 / 0.08
I max. (A)	0.31 / 0.14	0.25 / 0.12
EMC guideline	EN 55022 EN 55011	EN 55022 EN 55011
Weight (g)	64	74
Motor protection factor	IP 30	IP 33

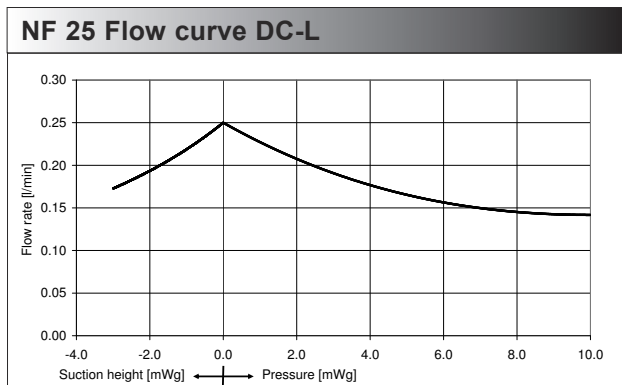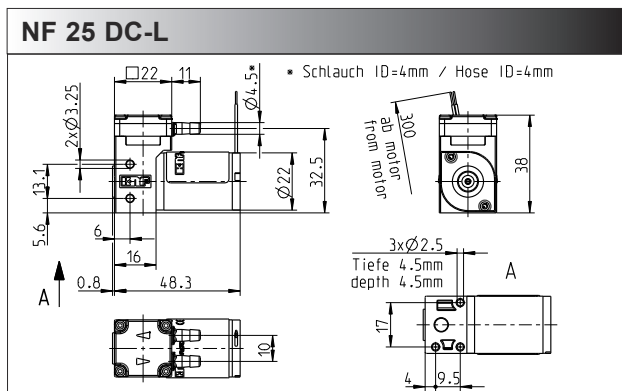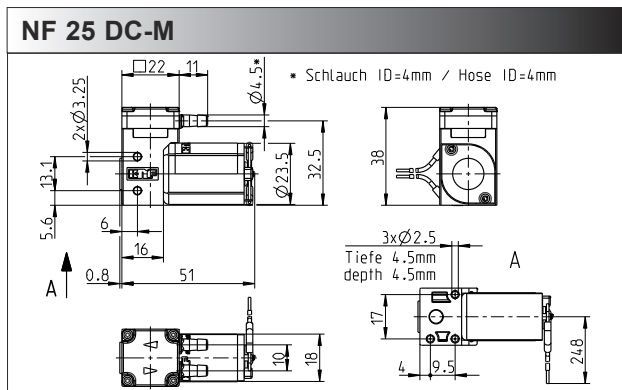

Performance

Basic model	Flow rate at atmos. pressure (ml/min)	Max. suction head (mWg)	Max. pressure head (mWg)
NF 25 DCB-4	25 - 250	3	10

Motor selection	DCB-4
Supply voltage (V)	10...28
Power rating (W)	2.6
I max. last (A)	0.26...0.09
I max. (A)	0.45
EMC guideline	EN 61000-6-2 EN 61000-6-3
Weight (g)	60
Motor protection factor	IP 40

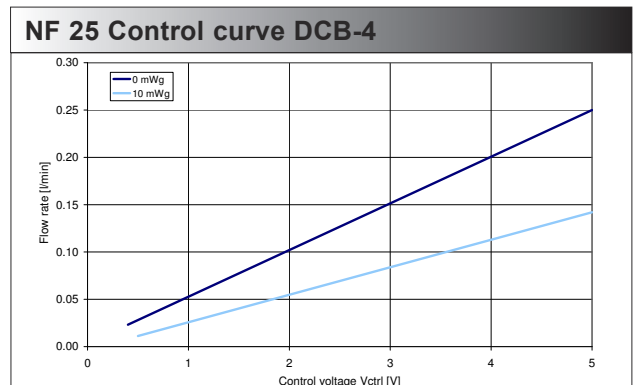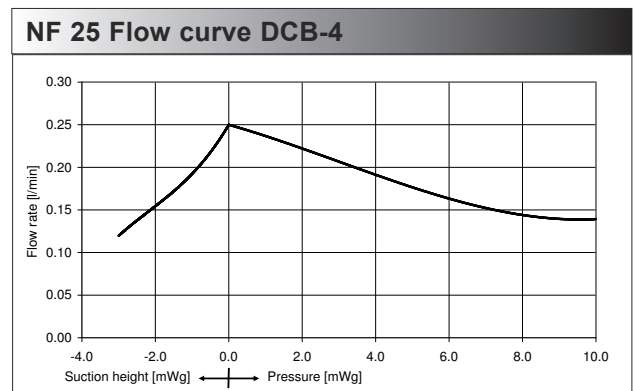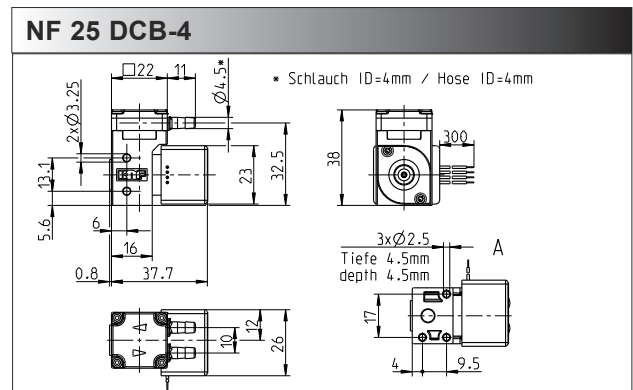



Diaphragm pressure control valve

The pressure control valve can be used for a more accurate control of flow against a fluctuating back pressure, metering into a vacuum and from a pressurised system. Used correct it can save pumps, plumbings and other fittings from damage.



Pulsation damper

This very versatile pulsation damper reduces the vibration in hoses and pipes and it helps to remove pulsation which is preventing the system from functioning correctly. It also protects instrumentation connected after the pump.

Further accessories

- Hoses
- Hoses connections
- Shock mounts

Further options

- Other materials
- Motors with special voltages
- The incorporation of customers special requirements, or example special
- Electrical connections (Molex, AMP, etc.)
- DCB Motor with 2 wires (12 V and 24 V)

We specialise in tailor made solutions. For all the possible options please feel free to contact us.

KNF offers a wide range of high-quality pumps and systems for moving both liquids and gases. Whether they are used as built-in OEM pumps, in process applications or in laboratories, KNF products offer high performance, precision, and reliability. We offer all of our customers expert and personal advice. Contact us today to discuss how we can assist you with your next project!

The KNF production sites worldwide:



KNF Neuberger GmbH, Germany



KNF Micro AG, Switzerland



KNF Flodos AG, Switzerland



KNF Neuberger SAS, France



KNF Neuberger, Inc., USA

KNF. GLOBALLY ACTIVE.

Germany

KNF Neuberger GmbH
D-79112 Freiburg
Tel. +49 7664 5909 0
info@knf.de
www.knf.de

Benelux Netherlands

KNF Verder B.V.
NL-3451 GG Vleuten
Tel. +31 30 677 92 40
info@knf-verder.nl
www.knf-verder.nl

Benelux Belgium and Luxemburg

KNF Verder N.V.
B-2630 Aartselaar
Tel. +32 3 871 96 24
info@knf.be
www.knf.be

China

KNF Technology (Shanghai) Co., Ltd.
Shanghai 201203
Tel. +86 21 5109 9695
info@knf.com.cn
www.knf.com.cn

France, Morocco, Tunisia, Algeria

KNF Neuberger SAS
F-68128 Village-Neuf
Tel. +33 389 70 35 00
info@knf.fr
www.knf.fr

UK

KNF Neuberger U.K., Ltd.
Witney, Oxfordshire OX28 4FA
Tel. +44 1993 77 83 73
info@knf.co.uk
www.knf.co.uk

India

KNF Pumps + Systems (India) Pvt. Ltd.
Hinjewadi, Pune 411 057
Tel. +91 20 640 13 923
+91 20 640 08 923
info@knfpumps.in
www.knfpumps.in

Italy

KNF ITALIA S.r.l.
I-20132 Milano
Tel. +39 02 272 03 860
info@knf.it
www.knf.it

Japan

KNF Japan Co.Ltd.
Tokyo 104-0033
Tel. +81 3 3551 7931
info@knf.co.jp
www.knf.co.jp

Korea

KNF Neuberger Ltd.
130-090, Seoul
Tel. +82 2 959 0255
knf@knfkorea.com
www.knfkorea.com

Sweden, Finland, Denmark, Norway

KNF Neuberger AB
SE-117 43 Stockholm
Tel. +46 8 744 51 13
info@knf.se
www.knf.se

Switzerland

Sales
KNF Neuberger AG
CH-8362 Balterswil
Tel. +41 71 973 99 30
knf@knf.ch
www.knf.ch

Switzerland

Production Liquid Pumps
KNF FLODOS AG
CH-6210 Sursee
Tel. +41 41 925 00 25
info@knf-flodos.ch
www.knf-flodos.ch

Switzerland

Production Micro Pumps
KNF Micro AG
CH-6260 Reiden
Tel. +41 62 787 88 88
info@knf-micro.ch
www.knf-micro.ch

Taiwan

KNF Neuberger Ltd.
Taipei City, 11490
Tel. +886 2 2794 1011
info@knftwn.com.tw
www.knf.com.tw

USA, Canada, Latin America

KNF Neuberger, Inc.
Trenton, New Jersey 08691-1810
Tel. +1 609 890 8600
knfusa@knf.com
www.knfusa.com

Latin America

Tel. +1 609 649 1010
gb@knf.com
www.knf.com/es